

TECHNICAL DATASHEET

VOLTHOR HR - HOT REGION MF64589

ORDER INFORMATION

TAB ID
360612

Short Code
MF64589

DIN Marking

EAN Code
3838807045026

Quantity per EU/CNT pallet
0/54 pcs

TECHNOLOGY

Primary Function
Engine Start

Battery Technology
Flooded

Grid Type (pos/neg)
Casted/Concasted

Grid Alloy (pos/neg)
Ca/Ca

Separator
PE

Electrolyte (g/cm³)
1,28

TECHNICAL INFORMATION

Voltage (V)
12

Capacity C20 (Ah)
140

CCA -18°C EN (A)
850

RC (min)
269

LxWxH (mm)
507x188x200/228

Total Weight (kg)
25.6

BOX DESIGN

Box Type
A

Cover Type
SMF




Colour
Black

Layout
3

BHD
B0

Terminal
1


DRAWING

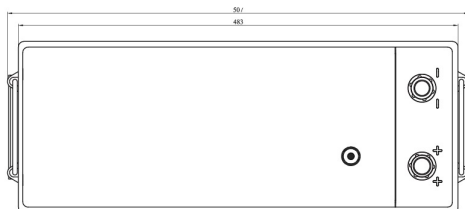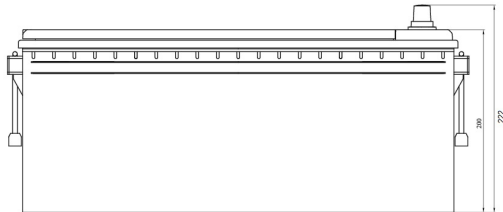


BHD



LAYOUT

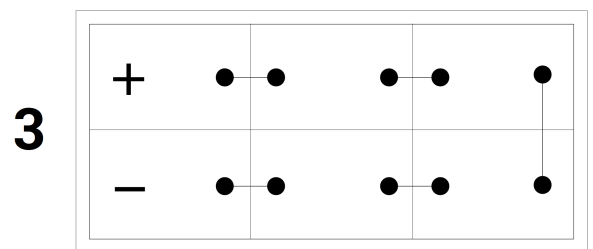

TERMINAL

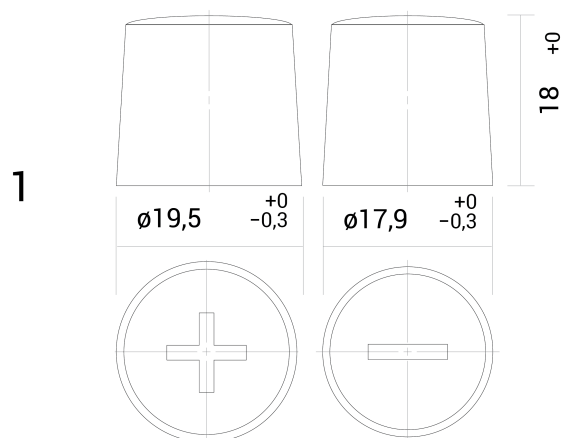

TECHNICAL DATASHEET

VOLTHOR HR - HOT REGION MF64589

TAB d.d, Polena 6, SI-2392 Mežica, Slovenia, www.tab.si