

TECHNICAL DATASHEET

TAB HR - HOT REGION MF67018

ORDER INFORMATION

TAB ID
447612

Short Code
MF67018

DIN Marking

EAN Code
3838807040908

Quantity per EU/CNT pallet
0/48 pcs

TECHNOLOGY

Primary Function
Engine Start

Battery Technology
Flooded

Grid Type (pos/neg)
Casted/Concasted

Grid Alloy (pos/neg)
Ca/Ca

Separator
PE

Electrolyte (g/cm³)
1,28

TECHNICAL INFORMATION

Voltage (V)
12

Capacity C20 (Ah)
170

CCA -18°C EN (A)
1000

RC (min)
338

LxWxH (mm)
513x222x194/221

Total Weight (kg)
43.5

BOX DESIGN

Box Type
B

Cover Type
SMF




Colour
Black

Layout
3


BHD
B0

Terminal
1

DRAWING

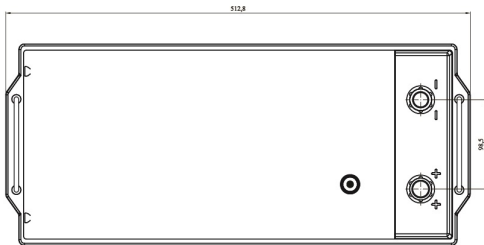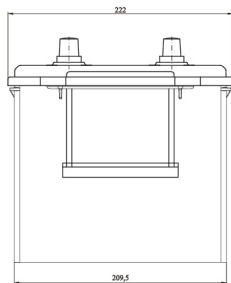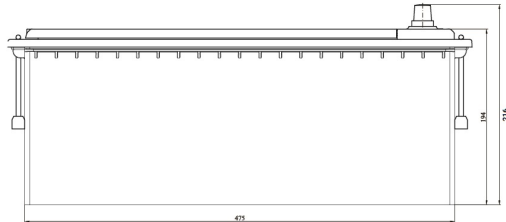

BHD



LAYOUT



TERMINAL



TECHNICAL DATASHEET

TAB HR - HOT REGION MF67018