

TECHNICAL DATASHEET

TOPLA HR - HOT REGION MF72527

ORDER INFORMATION

TAB ID

Short Code

MF72527

DIN Marking

EAN Code

3838807045712

Quantity per EU/CNT pallet

0/36 pcs

TECHNOLOGY

Primary Function

Engine Start

Battery Technology

Flooded

Grid Type (pos/neg)

Casted/Concasted

Grid Alloy (pos/neg)

Ca/Ca

Separator

PE

Electrolyte (g/cm³)

1,28

TECHNICAL INFORMATION

Voltage (V)

12

Capacity C20 (Ah)

225

CCA -18°C EN (A)

1300

RC (min)

469

LxWxH (mm)

517x275x214/241

Total Weight (kg)

56.1

BOX DESIGN

Box Type

C

Cover Type

SMF

Colour

Black

Layout

3




BHD

B0

Terminal

1

DRAWING

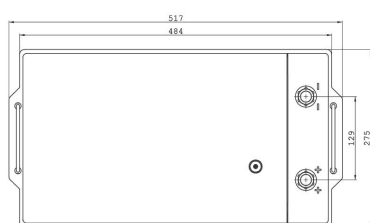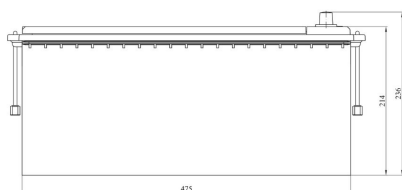


BHD

B 0




LAYOUT

3

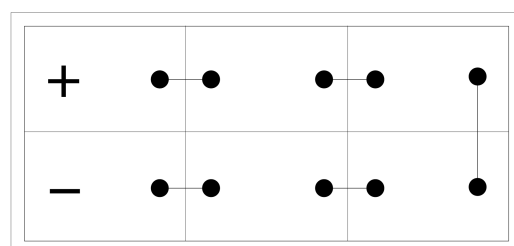

TERMINAL

1

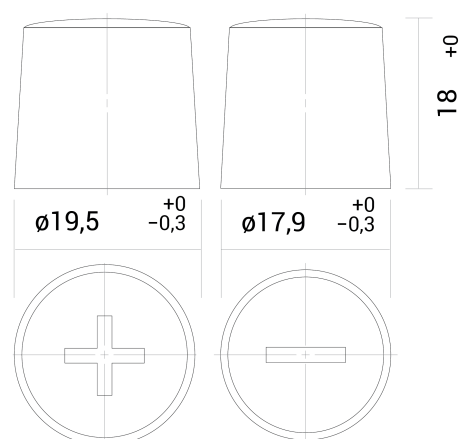

TECHNICAL DATASHEET

TOPLA HR - HOT REGION MF72527

TAB d.d, Polena 6, SI-2392 Mežica, Slovenia, www.tab.si