

TECHNICAL DATASHEET

TOPLA HR - HOT REGION MF75D31L

ORDER INFORMATION

TAB ID

Short Code

MF75D31L

DIN Marking

EAN Code

3838807045811

Quantity per EU/CNT pallet

0/108 pcs

TECHNOLOGY

Primary Function

Engine Start

Battery Technology

Flooded

Grid Type (pos/neg)

Expanded/Concasted

Grid Alloy (pos/neg)

Ca/Ca

Separator

PE

Electrolyte (g/cm³)

1,28

TECHNICAL INFORMATION

Voltage (V)

12

Capacity C20 (Ah)

75

CCA -18°C EN (A)

520

RC (min)

130

LxWxH (mm)

306x173x200/221

Total Weight (kg)

18.4

BOX DESIGN

Box Type

D31

Cover Type

SMF

Colour

Black

Layout

0


BHD

B01


Terminal

1


DRAWING

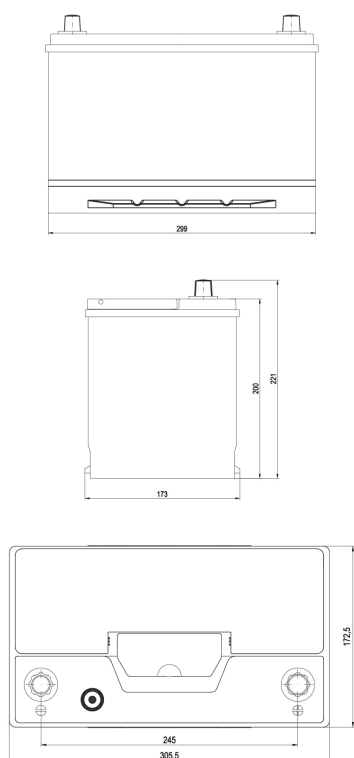


BHD



LAYOUT

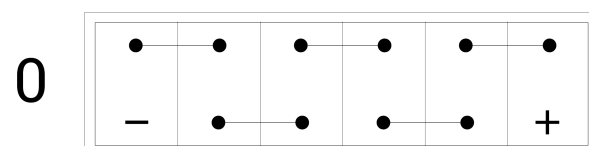

TERMINAL

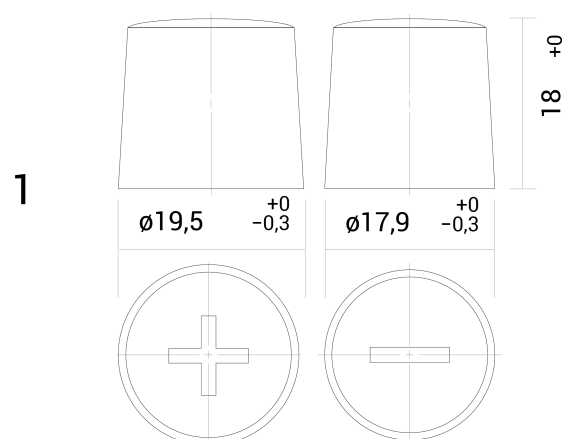

TECHNICAL DATASHEET

TOPLA HR - HOT REGION MF75D31L

TAB d.d, Polena 6, SI-2392 Mežica, Slovenia, www.tab.si