

TECHNICAL DATASHEET

TOPLA HR - HOT REGION L4 AGM

ORDER INFORMATION

TAB ID

Short Code

L4 AGM

DIN Marking

EAN Code

3838807046788

Quantity per EU/CNT pallet

0/90 pcs

TECHNOLOGY

Primary Function

Advanced Start/Stop Functionality

Battery Technology

AGM - Absorbent Glass Mat

Grid Type (pos/neg)

Casted/Concasted

Grid Alloy (pos/neg)

Ca/Ca

Separator

GM

Electrolyte (g/cm³)

1,3

TECHNICAL INFORMATION

Voltage (V)

12

Capacity C20 (Ah)

80

CCA -18°C EN (A)

800

RC (min)

151

LxWxH (mm)

315x175x190

Total Weight (kg)

23.2

BOX DESIGN

Box Type

L4

Cover Type

Sealed

Colour

Black

Layout

0




BHD

B13


Terminal

1


DRAWING

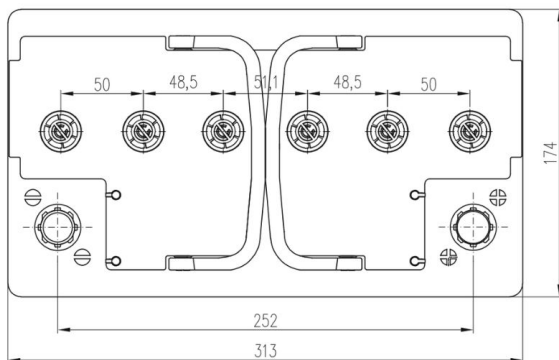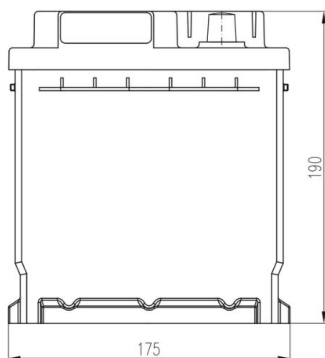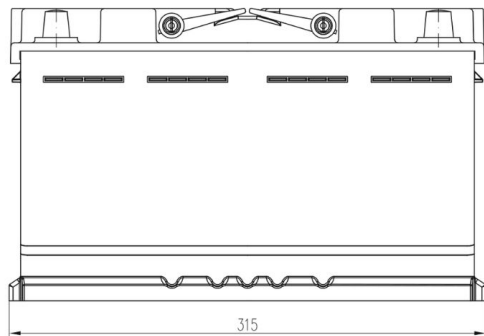


BHD



LAYOUT

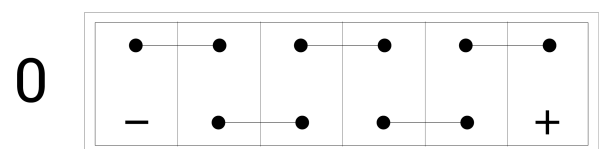

TERMINAL

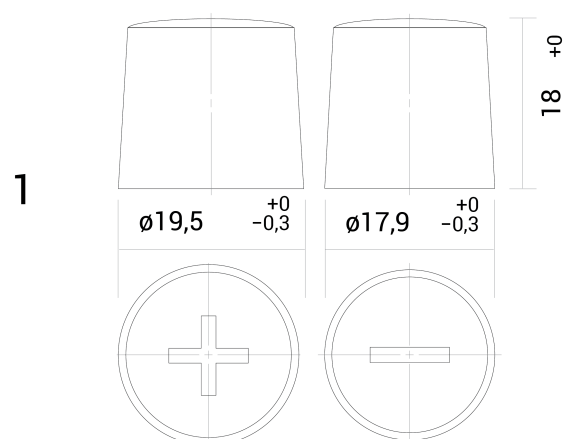

TECHNICAL DATASHEET

TOPLA HR - HOT REGION L4 AGM

TAB d.d, Polena 6, SI-2392 Mežica, Slovenia, www.tab.si