


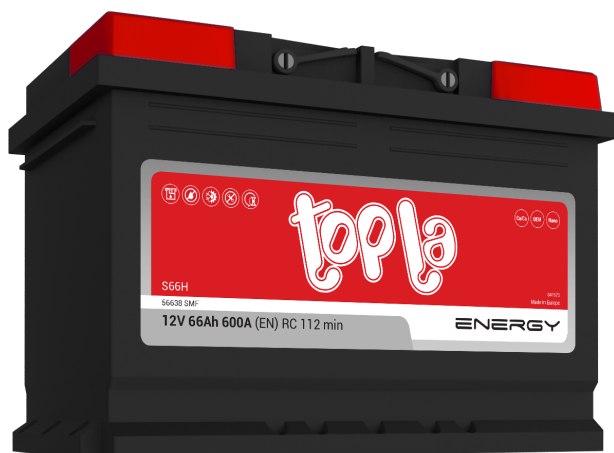

TECHNICAL DATASHEET

TOPLA ENERGY S66H

ORDER INFORMATION

TAB ID

1000215

Short Code

S66H

DIN Marking

56638 SMF

EAN Code

3838807036758

Quantity per EU/CNT pallet

51/80 pcs

TECHNOLOGY

Primary Function

Engine Start

Battery Technology

Flooded

Grid Type (pos/neg)

Expanded/Concasted

Grid Alloy (pos/neg)

Ca/Ca

Separator

PE

Electrolyte (g/cm3)

1,28

TECHNICAL INFORMATION

Voltage (V)

12

Capacity C20 (Ah)

66

CCA -18°C EN (A)

600

RC (min)

112

LxWxH (mm)

278x175x190

Total Weight (kg)

16.1

BOX DESIGN

Box Type

L3

Cover Type

SMF

Colour

Black

Layout

0




BHD

B13


Terminal

1


DRAWING

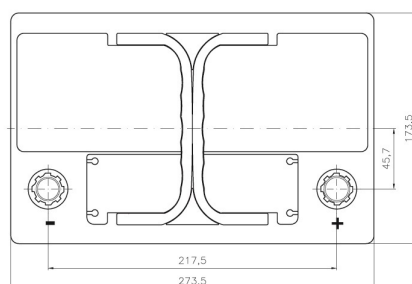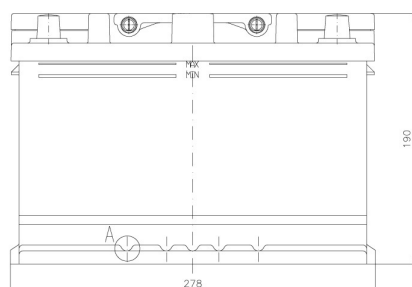


BHD



LAYOUT

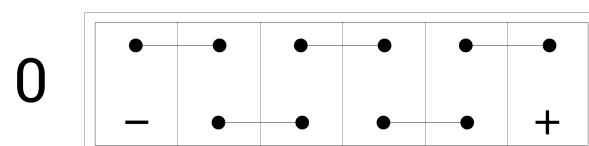

TERMINAL

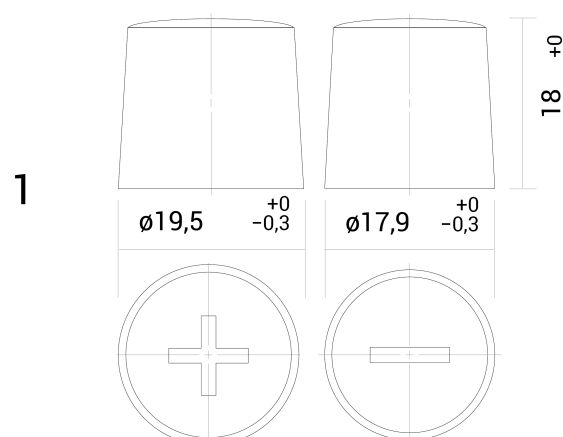

TECHNICAL DATASHEET

TOPLA ENERGY S66H

TAB d.d, Polena 6, SI-2392 Mežica, Slovenia, www.tab.si